



UF180(55)APA series

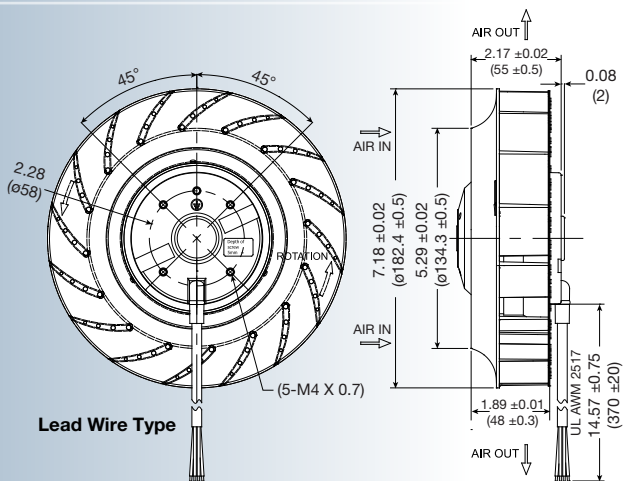


Size: (182 dia. x 55 mm)
7.18 x 2.17 inches

- Features:** backward curved impeller
- Operating voltage (VAC):** 115 or 230
- Operating temp:** -40° ~ 50°C
- Construction:** aluminum die cast motor base
UL94V-0 reinforced nylon impeller
- Bearing option:** motor quality ball bearings
- Motor:** 2 pole permanent split capacitor,
single phase
- Air flow:** centrifugal
- Connection:** 22 AWG lead wires; nom. 14 inches
- Protection:** thermal
- Insulation:** Class B

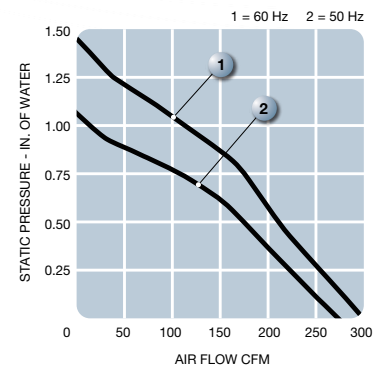

Motor Wiring Diagram

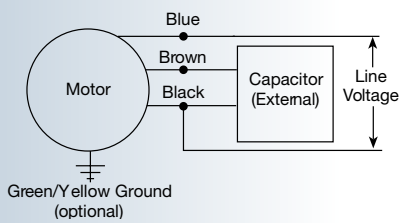

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dbA	Weight kg
							M ³ /Min.	CFM	MM	INCH		
UF180(55)APA12-H1C2A	115	50	68	0.60	0.92	2550	7.5	265	26	1.0	64	1.2
	115	60	78	0.70	0.95	2800	8.3	290	36	1.4	67	1.2
UF180(55)APA23-H1C2A	230	50	68	0.30	0.46	2550	7.5	265	26	1.0	64	1.2
	230	60	78	0.34	0.48	2800	8.3	290	36	1.4	67	1.2