UF12B series

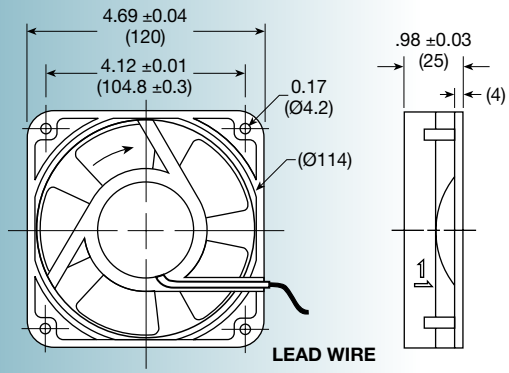



Size: (120 x 120 x 25 mm)
4.69 x 4.69 x 0.98 inches

Operating voltage (VAC):	115 or 230
Construction:	aluminum die cast frame; UL94V-0 PBT impeller
Bearing option:	motor quality ball bearings or sintered bronze sleeve
Motor:	shaded pole
Air flow:	exhaust over struts
Connection:	terminal or 22 AWG lead wire
Protection:	impedance

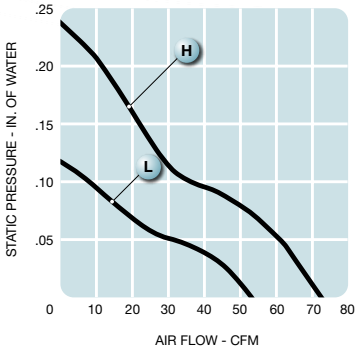

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H_2O)		Sound Noise db	Weight oz
							M^3/Min.	CFM	MM	INCH		
UF12B12-_ _H	115	60	11	0.12	0.15	2,900	2.1	75	6.0	0.24	42	11.6
UF12B23-_ _H	230	60	14	0.07	0.08	2,900	2.1	75	6.0	0.24	42	11.6
UF12B12-_ _L	115	60	11	0.11	0.12	2,000	1.5	53	2.9	0.11	33	11.6
UF12B23-_ _L	230	60	14	0.06	0.07	2,000	1.5	53	2.9	0.11	33	11.6

www.mechatronics.com E-mail: Sales@Mechatronics.com Fax: 425-222-5155 Tel: 425-222-5900 800-453-4569
03/22/11