


UF133(91)APA series

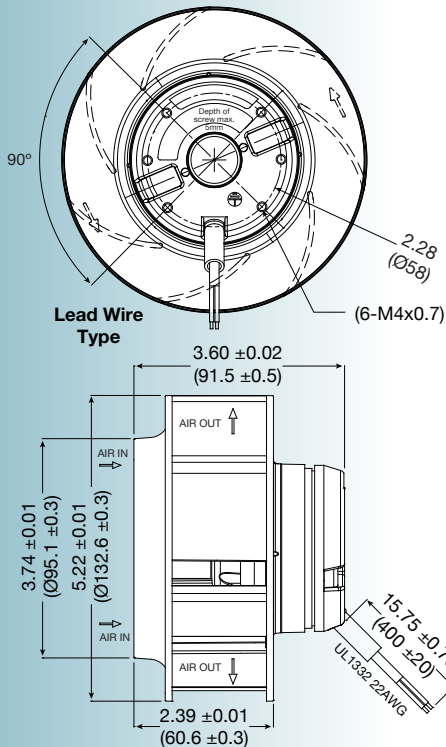

Size: (133 dia. x 91 mm)
5.22 dia. x 3.60 inches

Features: *backward curved impeller*

Operating voltage

(VAC): 115 or 230

Operating temp: -20° ~ 50°C

Construction:

aluminum die cast motor base,
UL94V-0 reinforced nylon impeller

Bearing option:

motor quality ball bearings

Motor:

2 pole shaded pole, single phase

Air flow:

centrifugal

Connection:


22 AWG lead wires

Protection:

thermal

Insulation:

Class B

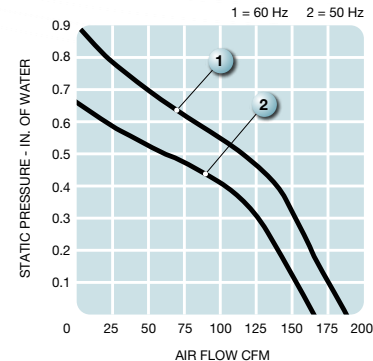

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise db	Weight LBS
							M ³ /Min.	CFM	MM	INCH		
UF133(91)APA12-H1S2A	115	50	38	0.50	0.83	2780	4.66	165	16.6	0.65	50	0.9
	115	60	37	0.43	0.72	3200	5.33	188	22.4	0.88	60	0.9
UF133(91)APA23-H1S2A	230	50	36	0.24	0.39	2780	4.66	165	16.6	0.65	50	0.9
	230	60	35	0.21	0.34	3200	5.33	188	22.4	0.88	60	0.9